

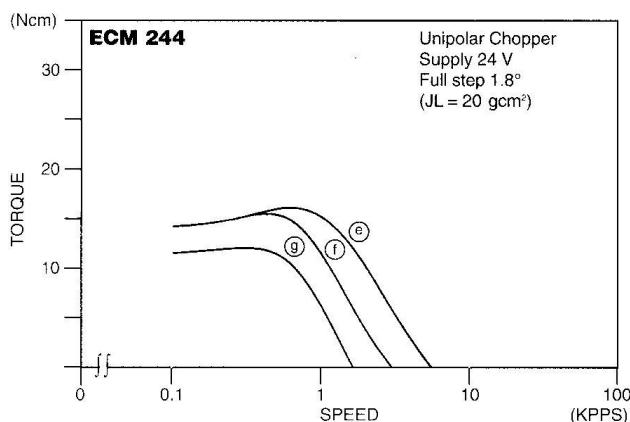


## ECM244er Baureihe

### 2-Phasen-Schrittmotor [1,8° Standard-Version]

Auslaufmodell

Model		unipolar bipolar series	Holding Torque (Ncm)	Current /Phase (Amps)	Resistance /Winding (Ohms)	Inductance /Winding (mH)	Torque /Speed	Number of Leads	Weight
Single Shaft	Double Shaft								Rotor Inertia
ECM 244-S 0.8 A	ECM 244-S 0.8 B	●	16	0.80	7.5	4.4	(e)	6	250 g 27 gcm <sup>2</sup>
ECM 244-S 0.8 A	ECM 244-S 0.8 B	●	21	0.57	15.0	17.6			
ECM 244-S 0.4 A	ECM 244-S 0.4 B	●	16	0.40	30.0	16.0	(f)		
ECM 244-S 0.4 A	ECM 244-S 0.4 B	●	21	0.28	60.0	64.0			
ECM 244-S 0.2 A	ECM 244-S 0.2 B	●	16	0.20	120.0	70.0	(g)		
ECM 244-S 0.2 A	ECM 244-S 0.2 B	●	21	0.14	240.0	280.0			

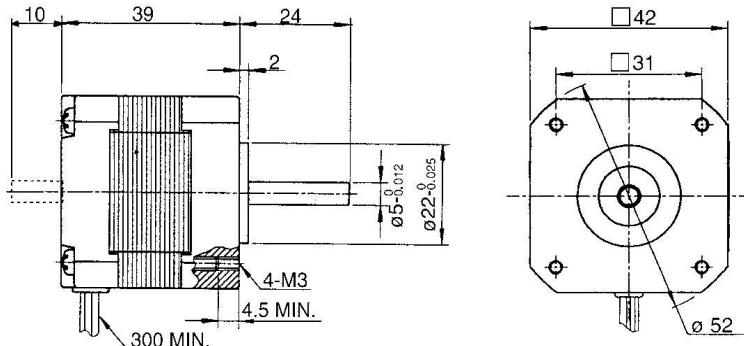

Optional sind für unsere Schrittmotoren Encoder und / oder Planetengetriebe erhältlich.