



ECM268... Serie

2-Phasen-Schrittmotor





[1,8° Standard-Torque-Version]

Auslaufmodell

Model A = Single Shaft B = Double Shaft	● Bipolar Parallel				● Bipolar Serial				● Unipolar				Torque Speed- curve
	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	
ECM268-E1.6 (A/B)	1.25	2.3	1.6	5.5	1.25	1.15	6.4	22.0	0.95	1.6	3.2	5.5	(R1)
ECM268-E2.3 (A/B)	1.25	3.3	0.85	3.5	1.25	1.65	3.4	14.0	0.95	2.3	1.7	3.5	(R2)

Number of Leads	Weight of Motor	Size Length	Rotor Inertia
8	1.0 kg	56.4 x 56.4 x 76 mm	234 x 10 ⁻⁷ kgm ²

Resistance / Phase (Ω) = ± 10%, Inductance / Phase (mH) = ± 20%

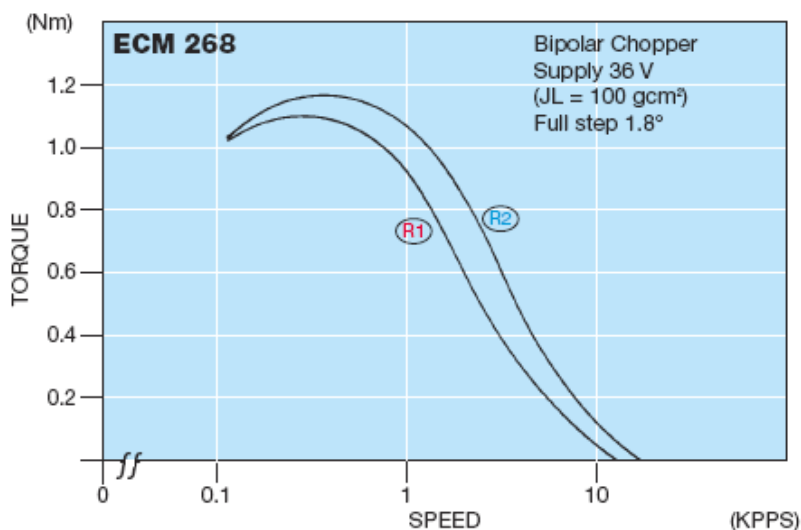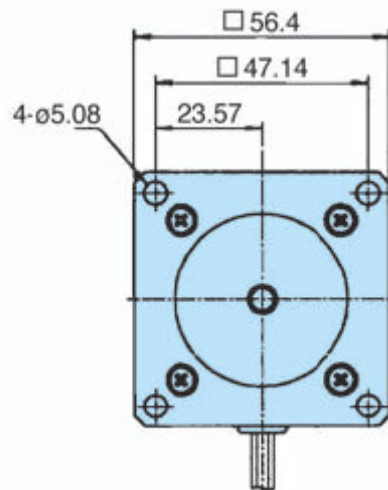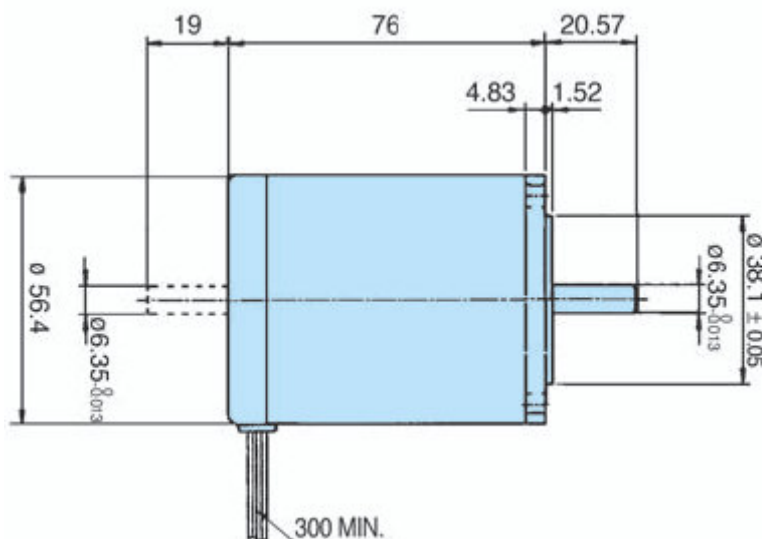

Planetengetriebe sind optional erhältlich