
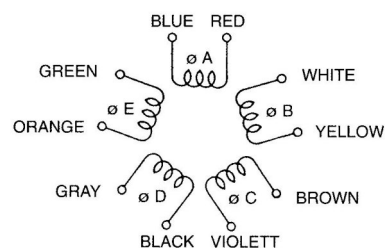
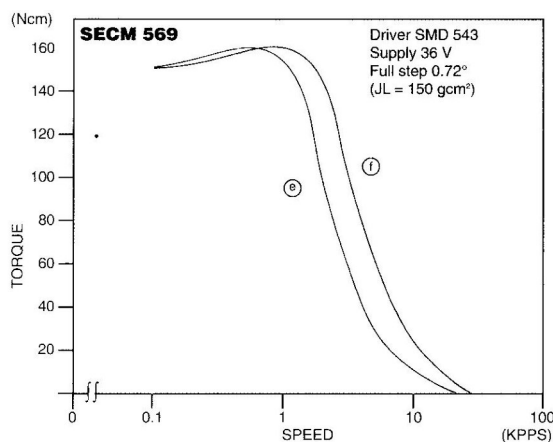


SECM569er Baureihe

5-Phasen-Schrittmotor

[0,72° High-Torque-Version]

Model	Full Step Angle	Holding Torque (Ncm)	Current/Phase (A)	Resistance/Winding (Ω)	Inductance/Winding (mH)	Voltage DC (V)	Torque/Speed
A = Single Shaft B = Double Shaft							
SECM 569 - T 1.4 A SECM 569 - T 1.4 B	0.72°	166	1.40	1.8	7.5	2.5	Ⓔ
SECM 569 - T 2.8 A SECM 569 - T 2.8 B	0.72°	166	2.80	0.65	2.5	1.8	Ⓕ
Number of Leads	Weight (Kg)		Size Length (mm)		Rotor Inertia (gcm ²)		
10	1.2		60x60x86.5		440		

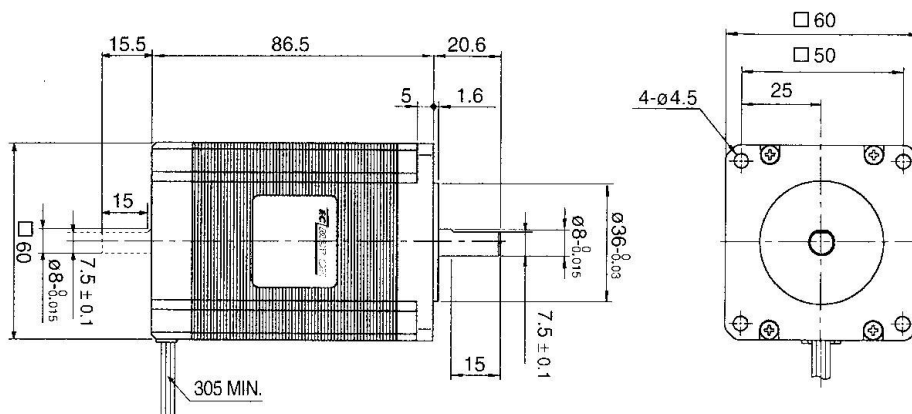

Optional sind für unsere Schrittmotoren Encoder und / oder Planetengetriebe erhältlich.